


Sinterfilter

K19-304.0-S1

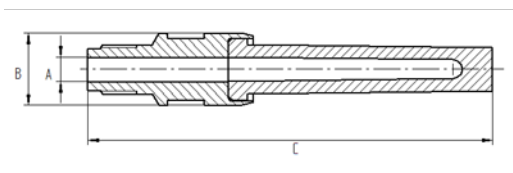

product characteristic

screw-in accessory, which protects against potential contamination from the cylinder (particles, water etc.) from entering the airways

technical data

| | |
|--------------------------|---|
| product area | AIRcontrol |
| connection thread | M8x0.75 |
| tightening torque | 8-10 Nm |
| width across flat | AF10 |
| weight | approx. 22 g |
| maintenance/service life | inspect at regular intervals (e.g. as part of the cylinder recertification) and replace depending on the inspection results |

dimensions

| | |
|---|---------------|
| A | ø 4 mm |
| B | ø 11.7 mm |
| C | approx. 66 mm |

material

| | |
|--------|---|
| metals | <ul style="list-style-type: none"> • jacket: brass • filter: bronze, sintered |
|--------|---|